


E.series Water heaters



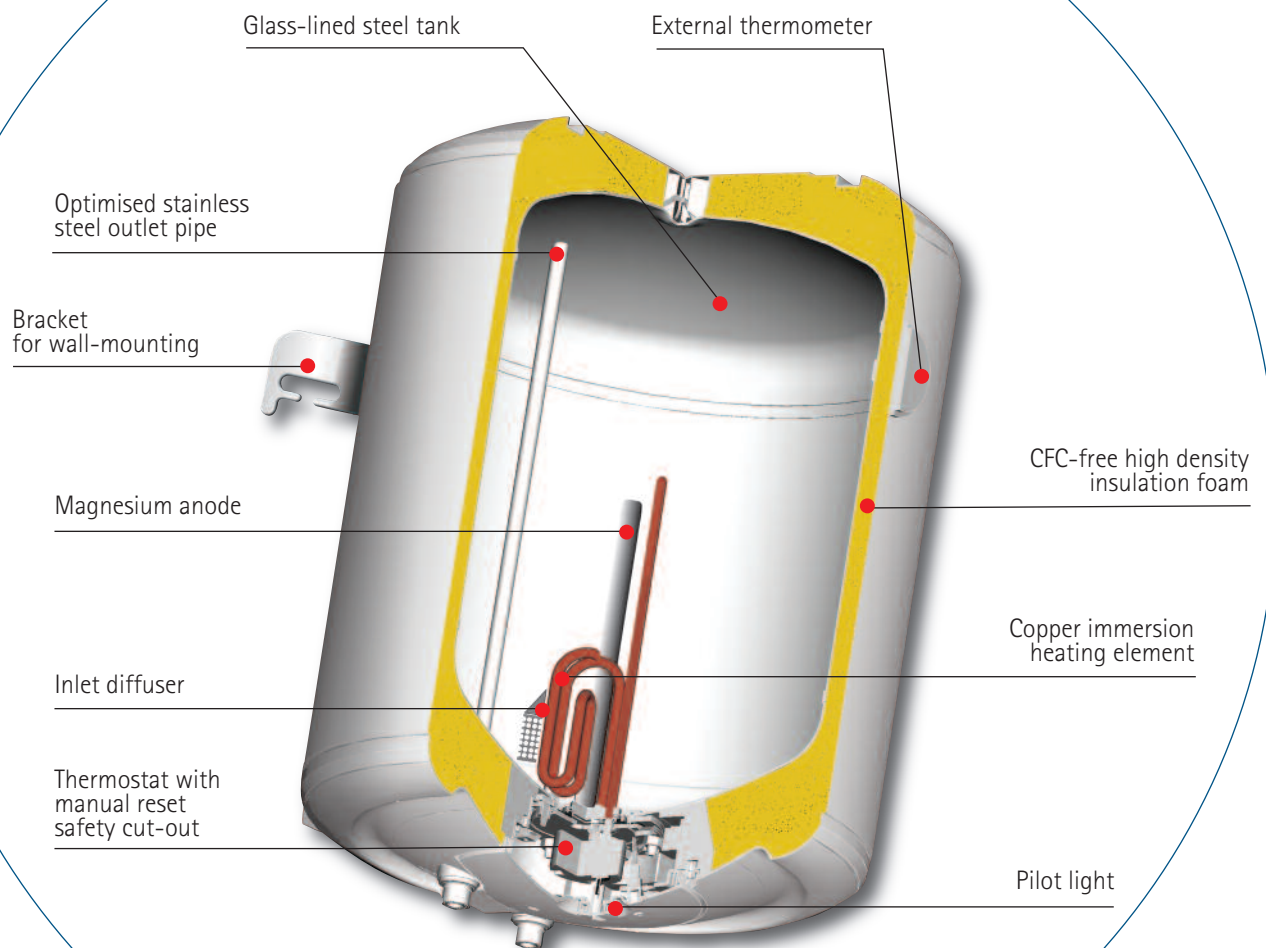

Ratings and dimensions

Vertical wall mounted range

| Capacity (L) | Output (W) 230 V | Voltage (V) | Energy Consumption (kWh/24h at 65°C) | Heat-up time at 60°C (Δt=20°C) | Heat-up time at 60°C (Δt=50°C) |
|--------------|------------------|---------------|--------------------------------------|--------------------------------|--------------------------------|
| 30 | 1200 | 230 (220-240) | 0,80 | 0h36 | 1h30 |
| 50 | 1500 | 230 (220-240) | 0,88 | 0h48 | 2h00 |
| 80 | 1500 | 230 (220-240) | 1,32 | 1h17 | 3h14 |
| 100 | 1500 | 230 (220-240) | 1,62 | 1h36 | 4h02 |
| 120 | 1500 | 230 (220-240) | 1,73 | 1h41 | 4h47 |

| Capacity (L) | Dimensions (mm) | | | | | | | Manhole opening (Ø) | Weight empty (kg) |
|--------------|-----------------|-----|-----|-----|-----|------------|-----|---------------------|-------------------|
| | A | B | C | D | E | F | G | | |
| 30 | 417 | 433 | 235 | 451 | 165 | 100 to 280 | 240 | 72 mm | 14 |
| 50 | 559 | 433 | 380 | 451 | 165 | 100 to 280 | 240 | 72 mm | 16 |
| 80 | 791 | 433 | 590 | 451 | 165 | 100 to 280 | 240 | 72 mm | 20 |
| 100 | 948 | 433 | 740 | 451 | 165 | 100 to 280 | 240 | 72 mm | 22 |
| 120 | 1111 | 433 | 906 | 451 | 165 | 100 to 280 | 240 | 72 mm | 29 |

(Depending on models)

(For other standards, consult us)

Horizontal wall mounted range


| Capacity (L) | Output (W) 230 V | Voltage (V) | Energy Consumption (kWh/24h at 65°C) | Heat-up time at 60°C (Δt=20°C) | Heat-up time at 60°C (Δt=50°C) |
|--------------|------------------|---------------|--------------------------------------|--------------------------------|--------------------------------|
| 50 | 1500 | 230 (220-240) | 1,10 | 0h40 | 1h40 |
| 80 | 1500 | 230 (220-240) | 1,34 | 1h06 | 2h45 |
| 100 | 1500 | 230 (220-240) | 1,85 | 1h28 | 3h40 |

| Capacity (L) | Dimensions (mm) | | | | | | Manhole opening (Ø) | Weight empty (kg) |
|--------------|-----------------|-----|-----|-----|-----|-----|---------------------|-------------------|
| | A | B | C | D | E | F | | |
| 50 | 542 | 433 | 170 | 451 | 234 | 343 | 72 mm | 16 |
| 80 | 774 | 433 | 360 | 451 | 234 | 343 | 72 mm | 20 |
| 100 | 931 | 433 | 510 | 451 | 234 | 343 | 72 mm | 22 |


(Depending on models)

(For other standards, consult us)


Top view



Vertical model



Top view



Horizontal model

